

NONKEY TELEPHONE SETS

CONVERSION FOR USE WITH 1A1 OR 1A2 KEY TELEPHONE SYSTEMS


1. GENERAL

1.001 This addendum supplements Section 502-110-102, Issue 4. Place this pink sheet ahead of Sheet 1 of this section.

1.002 This addendum is issued to revise Fig. 5.

2. CHANGES TO SECTION


2.001 On Page 8 revise Fig. 5 as shown in this addendum.

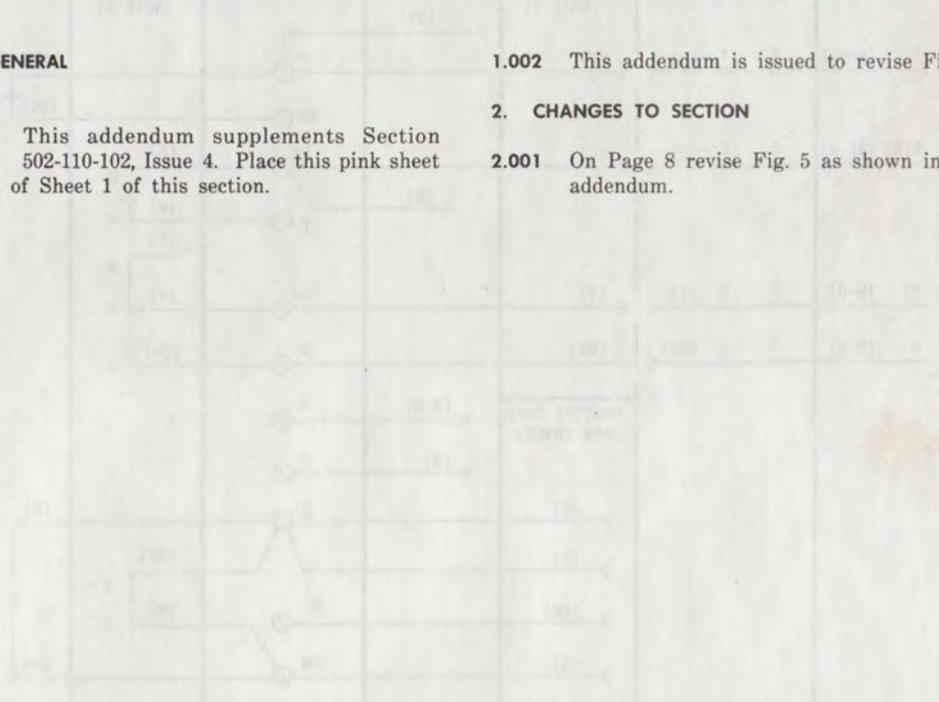

NOTICE

Not for use or disclosure outside the
 Bell System except under written agreement

NO.	REVISION	DATE	BY
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			
21			
22			
23			
24			
25			
26			
27			
28			
29			
30			
31			
32			
33			
34			
35			
36			
37			
38			
39			
40			
41			
42			
43			
44			
45			
46			
47			
48			
49			
50			

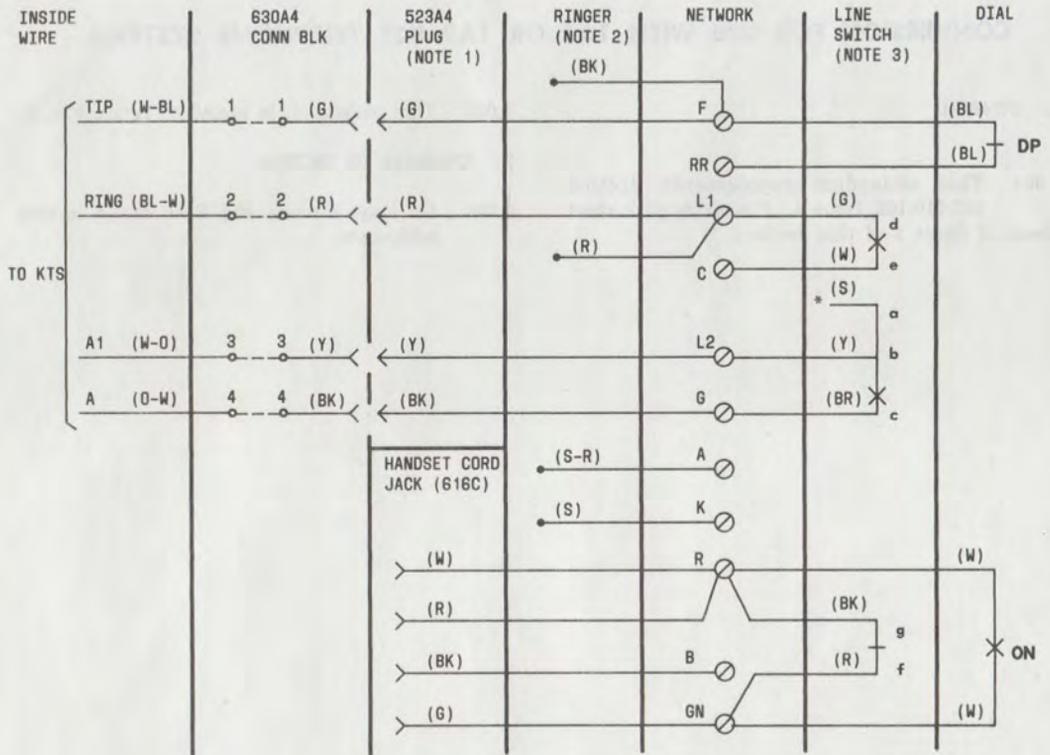

SET MODIFICATION

LEAD	COLOR	FROM	TO
523A4 PLUG	G		F
	R		L1
	Y		L2
	BK		G
RINGER	BK	L1	F
	R	L2	L1
LINE SWITCH	W	F	C
	BR	C	G
	S	L2	*

NOTES:

1. REPLACE 523A3 PLUG WITH 523A4 PLUG, ORDERED SEPARATELY.
2. WIRED FOR INDIVIDUAL OR BRIDGED RINGING.
3. TO PREVENT FALSE HOLD CONDITION WHEN GOING ON-HOOK, THE TIP AND RING CONTACTS OF THE LINE SWITCH MUST BREAK BEFORE "A" LEAD CONTACTS. (FIELD ADJUSTMENT OF LINE SWITCH NOT RECOMMENDED).

* INSULATE AND STORE

DP - DIAL PULSE CONTACTS

ON - DIAL OFF-NORMAL CONTACTS

Fig. 5-554BMP Telephone Set, Connections for Use With 1A1 or 1A2 KTS