


SERVICE

558C/D TELEPHONE SETS

1. GENERAL

1.01 Reissued to add nontechnical changes to Fig. 1.

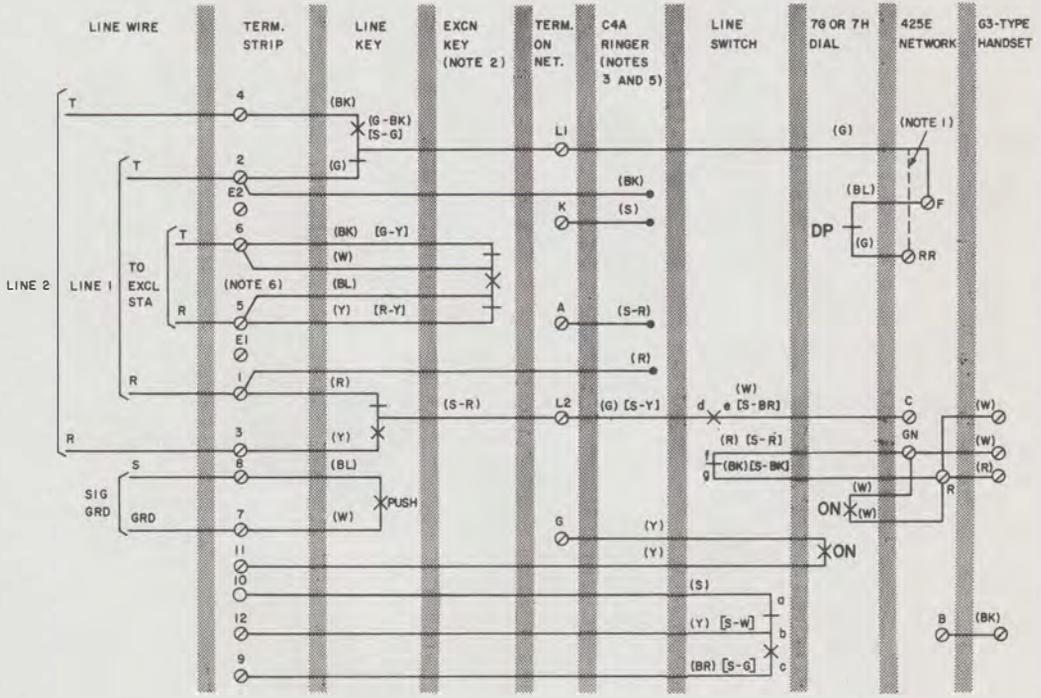

- NOTES:
1. DASHED LINE INDICATES MANUAL SET CONNECTIONS.
 2. FOR EXCLUSION ON LINE 1, CONNECT (Y)[R-Y] AND (BK)[G-Y] EXCLUSION KEY LEAD TO TERMINALS 1 AND 2 RESPECTIVELY; FOR EXCLUSION ON LINE 2, CONNECT (Y) R-Y AND (BK)[G-Y] EXCLUSION KEY LEADS TO TERMINALS 3 AND 4 RESPECTIVELY.
 3. SET WIRED FOR RINGING ON LINE 1. FOR RINGING ON LINE 2 CONNECT (R) AND (BK) RINGER LEADS TO TERMINALS 3 AND 4 RESPECTIVELY.
 4. A 7-TYPE BUZZER ON A 44B BRACKET MAY BE SUBSTITUTED FOR THE RINGER AS A COMMON OR PRIVATE LINE AUDIBLE SIGNAL.
 5. TO SILENCE RINGER PERMANENTLY, CONNECT (BK) RINGER LEAD TO TERMINAL K ON NETWORK.
 6. ON LATER MODEL SETS, CONNECTIONS TO TERMINALS 5 AND 6 HAVE BEEN TRANSPOSED.
- () CURRENT COLOR CODES.
[] MD COLOR CODES.
- DP - DIAL PULSE
ON - OFF NORMAL
LINE SWITCH SEQUENCE:
bc - MAKE
de - MAKE
ab - BREAK
fg - BREAK

Fig. 1—558C/D Telephone Set Connections, 2-Line Pickup, Signaling, Exclusion, and Control Leads