

NOT AUTHORIZED FEB 10 1964

HAND TELEPHONE SETS — 215A
MAGNETO — CONNECTIONS

1.00 INTRODUCTION

LIST DIV. 5 10 PS-1

This section covers the combination of apparatus, circuit diagram, and connections for the 215-type hand telephone sets for magneto service.

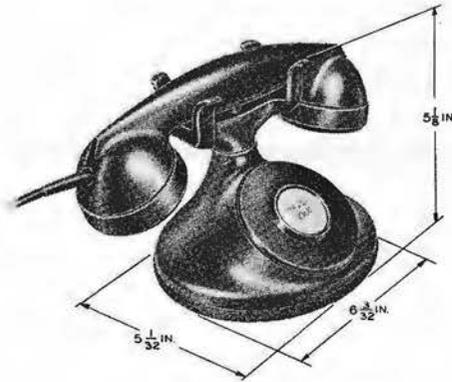


FIG. 1—215 TYPE

TABLE A—COMBINATION OF APPARATUS

Hand Tel. Set Code	Components					Note
	Handset	Handset Mounting	Apparatus Blank	Handset Cord	Mounting Cord	
215A-3E	E1E-3	D8-3	50J-3	H3	D4	1, 2
215A-3F	F1A-3, F1G-3, or F4A-3					

Notes

- Codes listed are for apparatus with black finish. For apparatus finished in other colors, the dash number (—3) is changed to the code number for the particular color.
- When the handset is equipped with spring cord, the suffix R will be added to the set code. For example, a 215A-3F becomes a 215AR-3F.

2.00 GENERAL

2.01 The 215A hand telephone set may be used in combination with any of the subscriber sets shown in Table B.

2.02 Hand telephone sets equipped with E-type handsets may be used when their use does not conflict with transmission zoning requirements.

2.03 To obtain complete information on connection of station apparatus, the circuit diagram herein should be matched with the circuit diagram in the section covering the connections for the appropriate subscriber set.

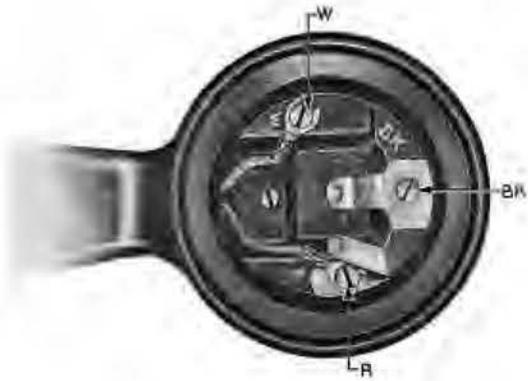
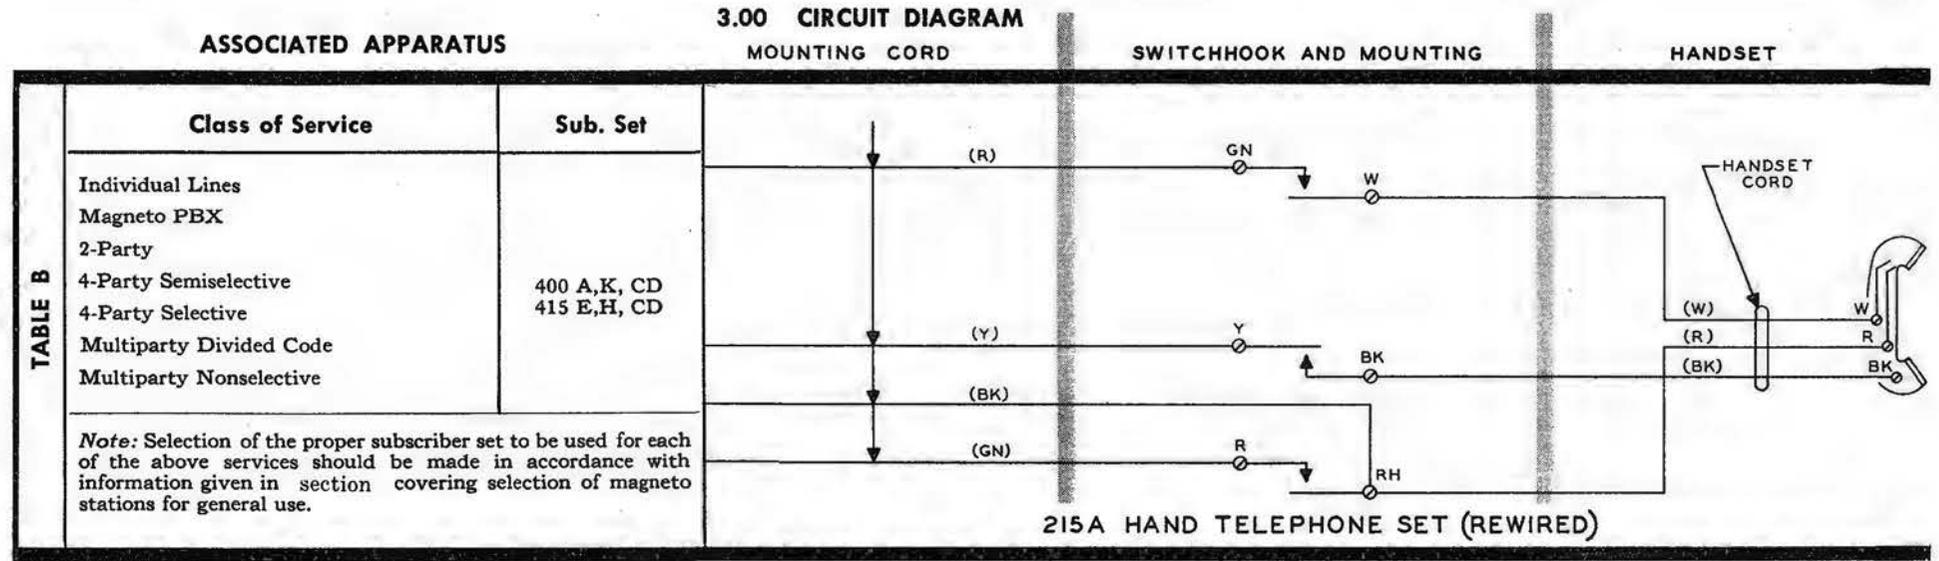


FIG. 2—F1A-3 HANDSET



FIG. 3—D8-3 HANDSET MOUNTING