

## 220-, 226-, 2220-, AND 2226-TYPE HAND TELEPHONE SETS IDENTIFICATION, INSTALLATION, CONNECTIONS, AND MAINTENANCE

### 1. GENERAL

1.001 This addendum supplements Section 502-303-102, Issue 2. Place this pink sheet ahead of Page 1 of this section.

1.002 This addendum is issued to delete all references to the D-180788 Kit of Parts (Polarity Guard) when used with a 2220B or 2220BM hand telephone set and installed in the associated AC- or AD-type telephone base. A new D-180984 Kit of Parts (Polarity Guard), ordered separately, shall be used and installed in the 2220B or 2220BM hand telephone set (Fig. 16.1). Hand telephone sets, coded 2220BMG with the polarity guard installed at the factory can also be ordered.

### 2. ADDITIONS TO SECTION

2.001 On Page 3, paragraph 2.09 add:

- Set, Telephone, Hand, 2220BMG-† (includes polarity guard)

2.002 On Page 6, paragraph 2.11; specify a D-180984 Kit of Parts (Polarity Guard) be

installed in the 2220B or 2220BM hand telephone set.

2.003 On Page 10, new paragraph 3.09 should read.


3.09 If a 2220B or 2220BM hand telephone set is provided and a polarity guard is required, a D-180984 Kit of Parts must be ordered separately and installed in the hand telephone set as follows.

- (1) Remove the shell from the hand telephone set as described in paragraph 3.02.
- (2) Remove the 227D adapter (if provided) from the handset cord jack.
- (3) Plug the polarity guard adapter into vacated jack (Fig. 16.1).
- (4) Dress the adapter leads as shown in Fig. 16.1 and replace the hand telephone set shell as described in paragraph 3.03.


**Note:** If the installation requires tip party identification on a two-party line with automatic number identification, a 2220C hand telephone set must be provided.

### NOTICE

Not for use or disclosure outside the  
Bell System except under written agreement

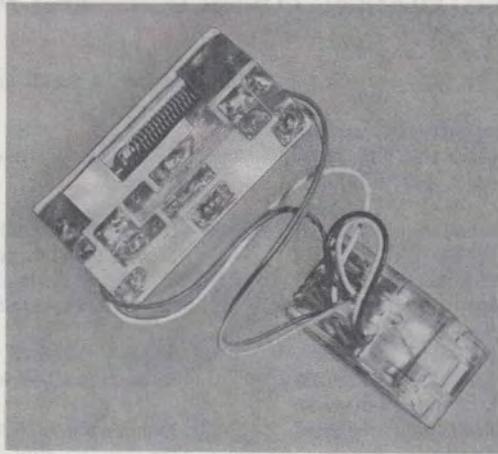

A. D-180984 KIT OF PARTS

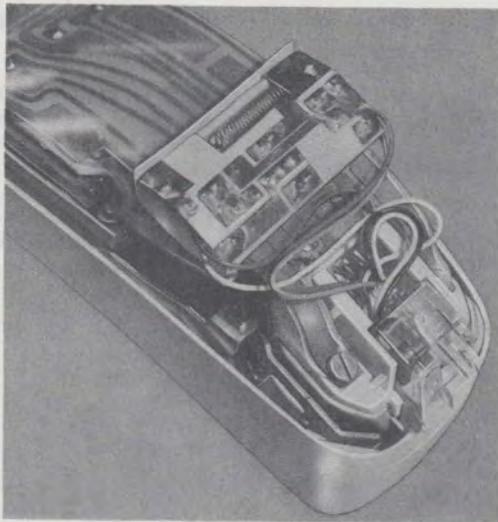

B. D-180984 KIT OF PARTS, INSTALLED  
IN HAND TELEPHONE SET

**Fig. 16.1—D-180984 Kit of Parts (Polarity Guard)  
Installed in 2220B or 2220BM Hand  
Telephone Set**