

SERVICE

558F AND 558FM TELEPHONE SETS

1. GENERAL

1.01 Reissued to:

- Show 558F telephone set MD
- Add Tables A and B
- Add D16J-87 mounting cord, Fig. 2

◆ TABLE B ◆

558F(MD) OR 558FM MODIFICATIONS FOR 1-LINE
PICKUP AND CUTOFF OF EXTENSION STATION
OR EXTENSION LINE RINGER

WIRE OR LEAD	COLOR	REMOVE FROM TERM. STRIP	CONNECT TO TERM. STRIP
Line Key	R	2	*
	S-R	15	2
	O-BK	3	*
	W-O	20	3
Exculsion Key	Y	2	*
Line Switch	G	15	2
Strap M1W Cord or Equivalent			1 to F on Net.
			3 to 20
D16J Mounting Cord	Y-BL	9	*
	BL-V	10	*
	V-O	11	*

* Insulate and store.

◆ TABLE A ◆


558F(MD) OR 558FM MODIFICATIONS FOR 1-LINE
PICKUP, HOLD, AND SECRETARIAL SERVICE

WIRE OR LEAD	COLOR	REMOVE FROM TERM. STRIP	CONNECT TO TERM. STRIP
Line Key	W-O	20	1
Exculsion Key (Hold)	BR	10	2
	W	9	1
	Y	2	*
D16J Mounting Cord	Y-BL	9	7
	BL-V	10	17
	Y-O	11	*
	W-O	3	*
	W-S	7	*
	O-W	4	*

* Insulate and store.

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement

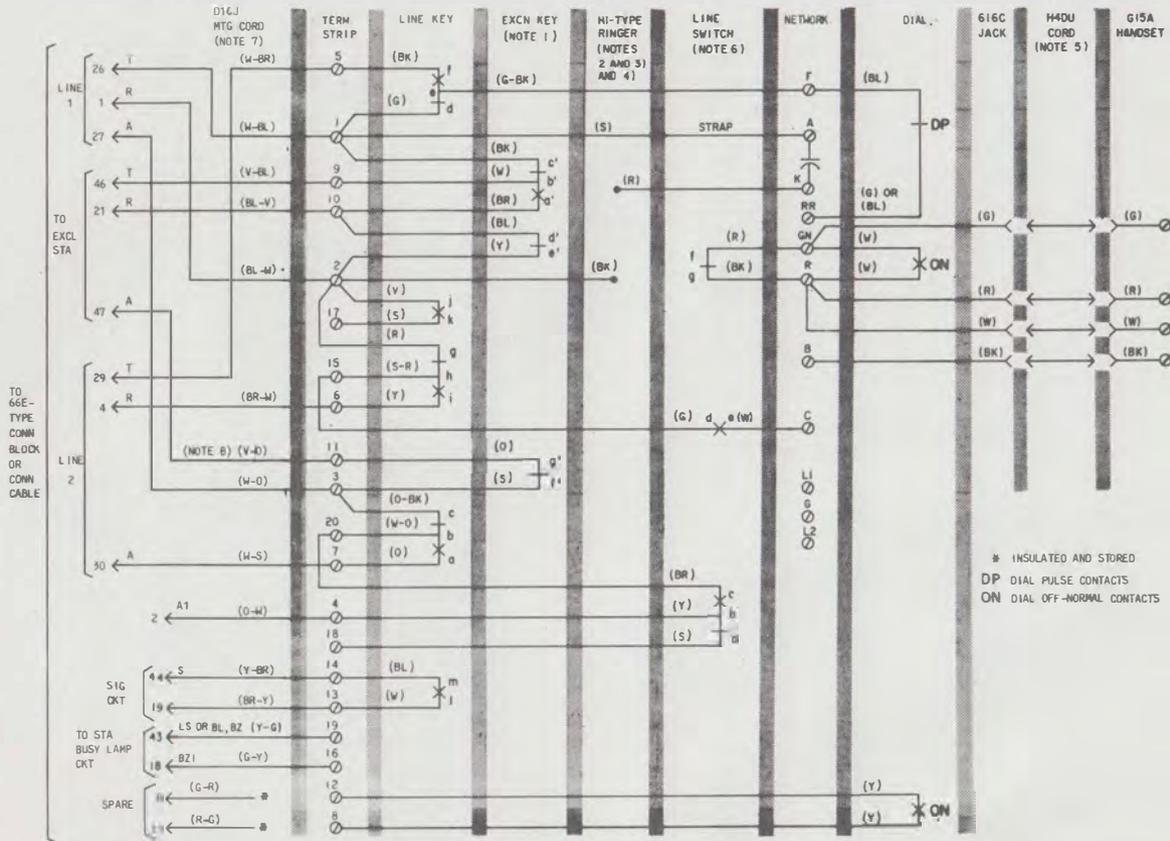

NOTES:

1. TO PROVIDE EXCLUSION FOR LINE 2, CONNECT (BK), (Y), AND (S) EXCLUSION KEY LEADS TO TERMINALS 7, 6 AND 7 RESPECTIVELY. IF EXCLUSION IS NOT REQUIRED ON EITHER LINE DISCONNECT, INSULATE, AND STORE EXCLUSION KEY (BR), (BK), (Y), AND (S) LEADS.
2. FOR RINGING ON LINE 2, TRANSFER (S) STRAP LEAD AND (BK) RINGER LEADS TO TERMINAL 7 AND 6 RESPECTIVELY.
3. TO SILENCE RINGER FOR ALL CLASSES OF SERVICE REFER TO APPROPRIATE SECTION IN DIVISION 501.
4. SET IS FACTORY WIRED FOR BRIDGED RINGING SERVICE CONNECTIONS FOR HI-B RINGER SHOWN.
5. MUST BE ORDERED SEPARATELY.
6. TO PREVENT FALSE HOLD CONDITION WHEN GOING ON HOOK THE TIP AND RING CONTACTS OF THE LINE SWITCH AND LINE KEY MUST BREAK BEFORE THE A-LEAD CONTACTS.
7. FOR SET CONNECTIONS TO A4 SPEAKERPHONE SYSTEM REFER TO APPROPRIATE SECTION IN DIVISION 512.
8. PROVIDE A1 GROUND AT EXCLUDED STATION.

* INSULATED AND STORED
 DP DIAL PULSE CONTACTS
 ON DIAL OFF-NORMAL CONTACTS

Fig. 2—558FM Telephone Set Connections Wired for 2-Line Pickup With Exclusion on Line 1, Signaling, and Speakerphone (Factory Wired)