

SERVICE

751-TYPE TELEPHONE SETS

1. GENERAL

1.01 The 751A (MD) and 751B (MD) telephone sets can be used on PBX line circuits and 751C and 751D telephone sets on PBX line circuits and 1A1 or 1A2 KTS. *These sets are no longer intended for residential use.*

1.02 Reissued to:

- Indicate that these sets are no longer for residential use

- Show 3A cord reel MD

- Revise Fig. 1 and 2.




The 3A (MD) cord reel shall be used when the telephone set is subjected to temperatures below 40 degrees F. The 3B cord reel shall be used when the telephone set is not subjected to temperatures below 40 degrees F.

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement

Printed in U.S.A.

Page 1

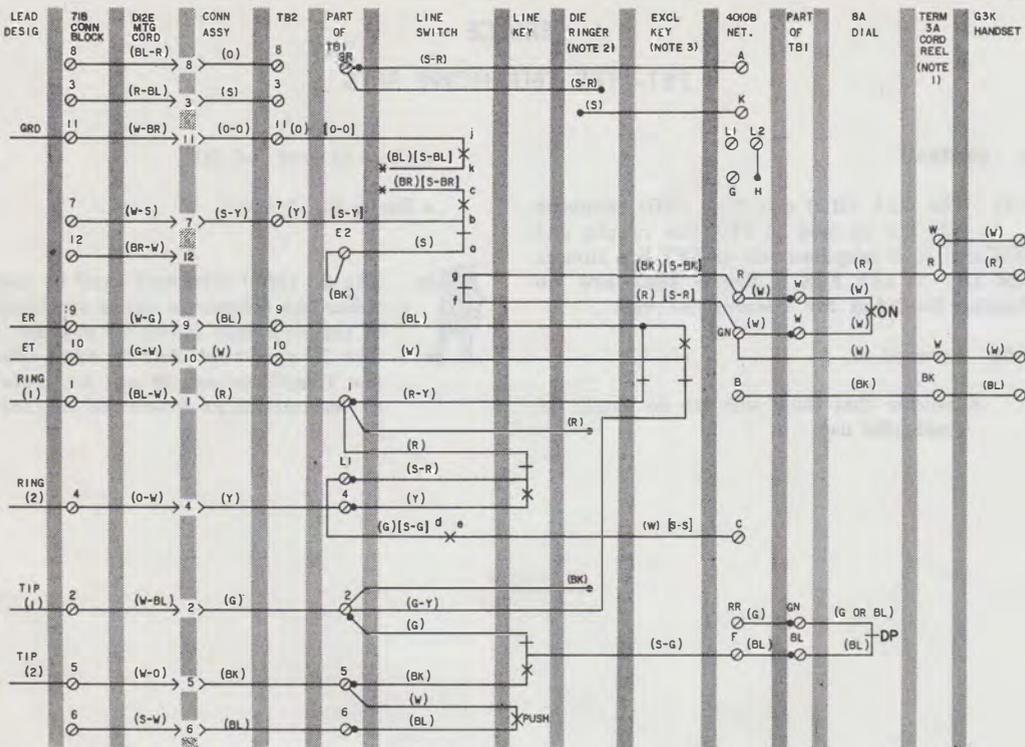

NOTES:

- 1. CURRENT MODELS OF THE 3A (MD) CORD REEL ARE NOT EQUIPPED WITH A TERMINAL BLOCK.
- 2. SET WIRED FOR RINGING ON LINE 1. TO RING ON LINE 2, MOVE (R) AND (BK) RINGER LEADS TO TERMINALS 4 AND 5 RESPECTIVELY.
- 3. TO EXCLUDE ON LINE 2, MOVE (R-Y) AND (G-Y) EXCLUSION KEY LEADS TO TERMINALS 4 AND 5 RESPECTIVELY.
- * INSULATED AND STORED
- () CURRENT COLOR CODE [] MD COLOR CODE

DP - DIAL PULSE
ON - OFF NORMAL

Fig. 1—751A (MD) and 751B (MD) Telephone Sets, Connections

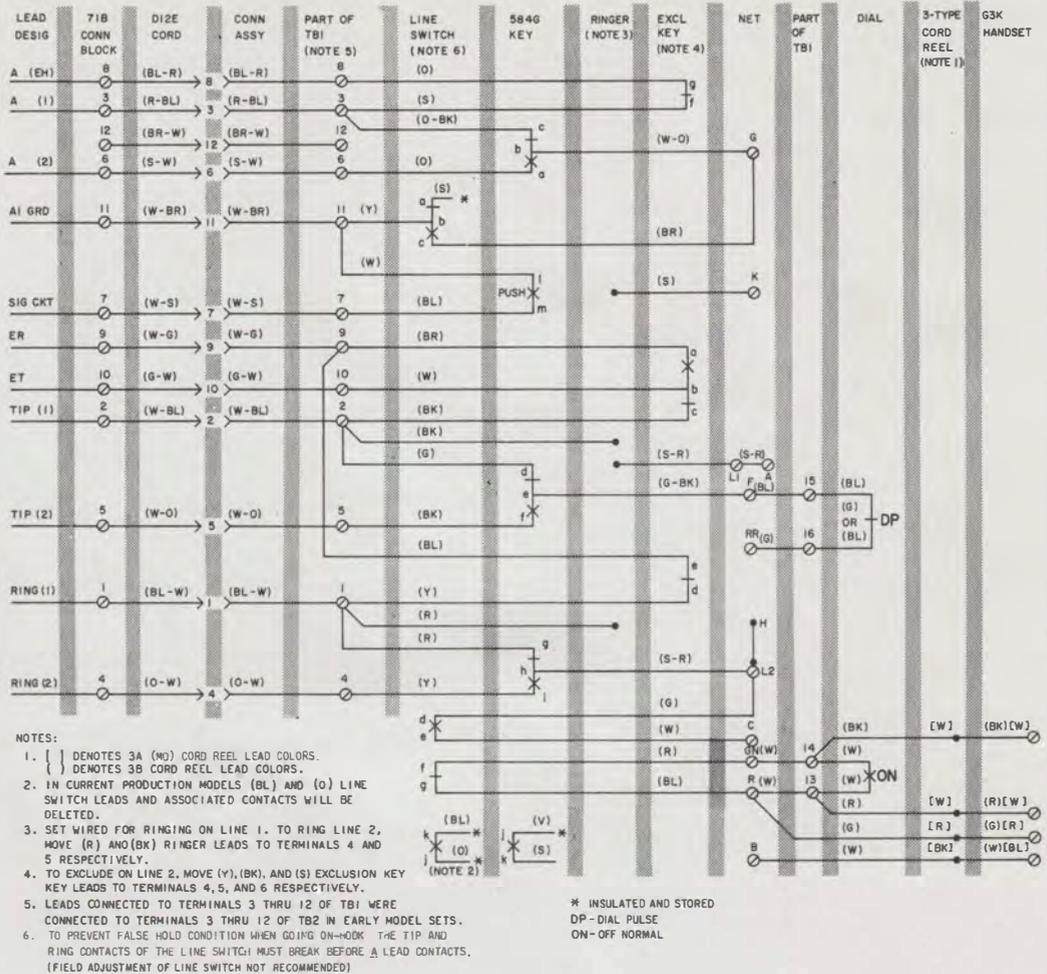


Fig. 2—751C and 751D Telephone Sets, Connections