

SERVICE

1751C AND D TELEPHONE SETS

1. GENERAL

1.01 Reissued to:

- Add nontechnical changes to Fig. 1, 2, and Table A
- Add Read note
- Show 25A3 and 25W3 dials MD

TABLE A

**POLARITY GUARD CONNECTIONS
(P-90D060 GUARD ASSEMBLY)**

LEAD	COLOR	FROM REMOVE	CONNECT TO	
		NET.	POLARITY GUARD	NET.
Dial	BK	RR	T	
Line Switch	W	C	S	
Polarity Guard	W			C
	G			RR

Note: For use when specified by local instructions for end-to-end signaling installations.



The 3A cord reel shall be used when the telephone set is subjected to temperatures below 40 degrees F. The 3B cord reel shall be used when the telephone set is not subjected to temperatures below 40 degrees F.

9


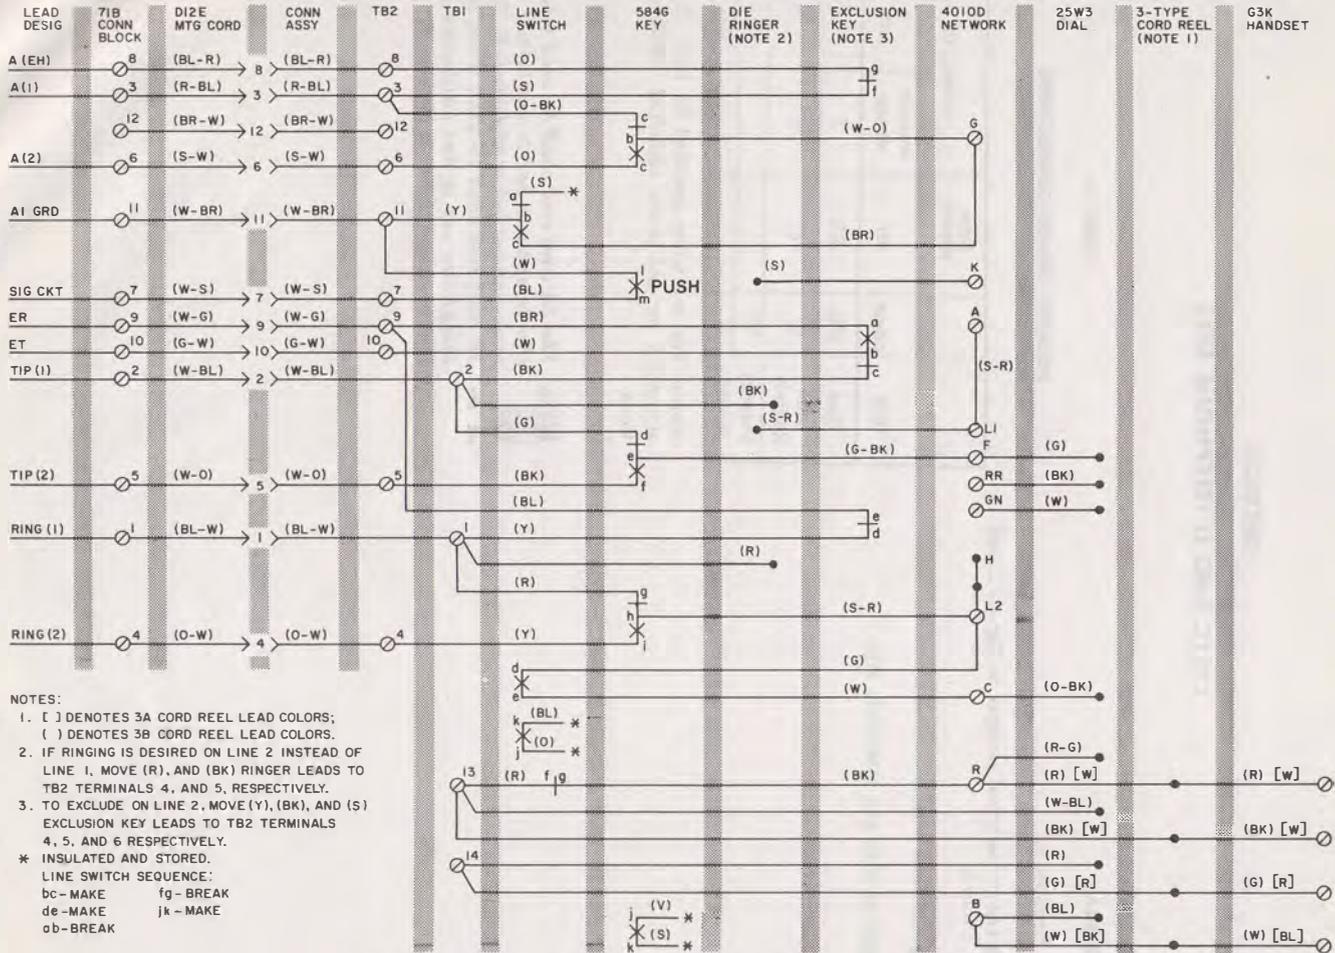


Fig. 1—1751C and D Telephone Set Connections With 25W3 (MD) Dial

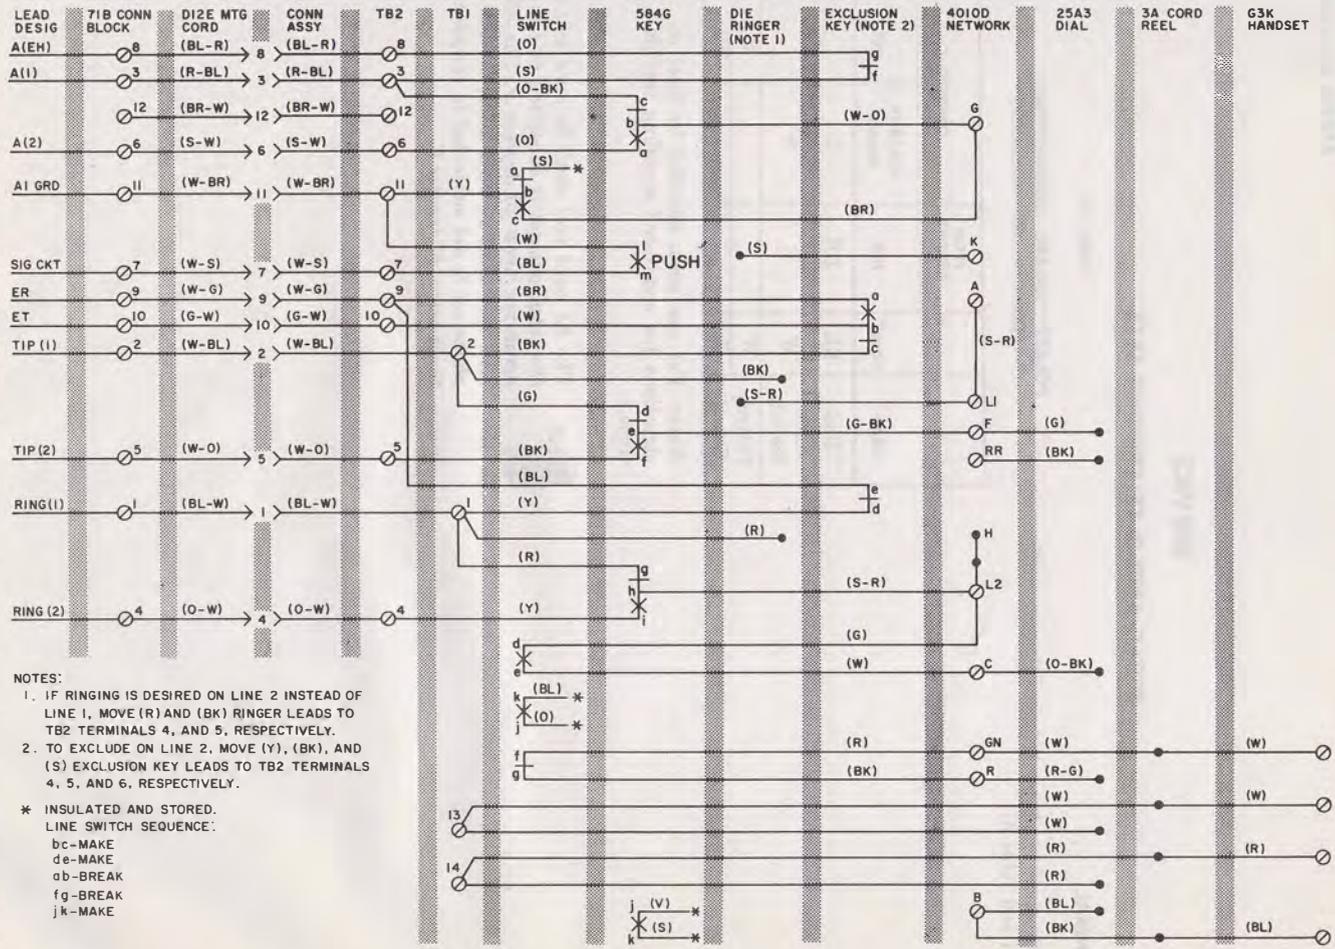

NOTES:

1. IF RINGING IS DESIRED ON LINE 2 INSTEAD OF LINE 1, MOVE (R) AND (BK) RINGER LEADS TO TB2 TERMINALS 4, AND 5, RESPECTIVELY.
2. TO EXCLUDE ON LINE 2, MOVE (Y), (BK), AND (S) EXCLUSION KEY LEADS TO TB2 TERMINALS 4, 5, AND 6, RESPECTIVELY.

* INSULATED AND STORED.
 LINE SWITCH SEQUENCE:
 bc-MAKE
 de-MAKE
 ab-BREAK
 fg-BREAK
 jk-MAKE

Fig. 2—1751C and D Telephone Set Connections With 25A3 (MD) Dial

ISS 2, SECTION 502-734-401

